

# FC BASICSTAT



## Thermostats for 2-pipe and 4-pipe Fan Coils

### Description

This range of fan coil controllers offers a simple but efficient solution for the control of 2/4-pipe fan coils with electric heaters.

The modern, ergonomic design enables simple installation on the wall or inside the fan coil unit.

The minimum thermostat guarantees an adequate level of comfort while preventing unpleasant draughts of cold air in the winter season.

The models with electronic ambient thermostat are equipped with special pegs that limit the set-point value to avoid energy waste.

#### Installations







- Independent wall-mounted thermostat for fan coils in compartments, ceiling-mounted or above doors.
- Installation integrated in floor-standing fan coil.

#### Main features

- Electronic ambient thermostat with set-point entered by means of knob (on FSS models only)
- Manual selection of operating mode.
- 3 fan speeds (min/med.max)
- Easy to use and install
- Hot Start function with digital input and temperature probe
- Set point limitation by means of special pegs
- "Built-in" or remote ambient air temperature probe (on FSS models only)

### Models

Various models are available to meet the requirements of a wide range of applications and installations.

|   |  |
|---|--|
|    | <b>FSC100</b><br>Manual mode selection, 3 fan speeds, hot start with digital input   |
|   | <b>FSC200</b><br>Manual mode selection, 3 fan speeds, hot start with temperature probe   |
|  | <b>FSS110</b><br>Ambient thermostat, manual mode selection, 3 fan speeds, built-in hot start air probe with digital input      |
|  | <b>FSS210</b><br>Ambient thermostat, manual mode selection, 3 fan speeds, built-in air probe, hot start with temperature probe |
|  | <b>FSS120</b><br>Ambient thermostat, manual mode selection, 3 fan speeds, remote air probe, hot start with digital input       |
|  | <b>FSS220</b><br>Ambient thermostat, manual mode selection, 3 fan speeds, remote air probe, hot start with temperature probe   |



**eliwell**

Invensys Controls Europe  
An Invensys Company

| Features                        |  | FC CAP       |              | FC STAT      |              |              |              |
|---------------------------------|--|--------------|--------------|--------------|--------------|--------------|--------------|
| Model                           |  | FSC 100      | FSC 200      | FSS 110      | FSS 210      | FSS 120      | FSS 220      |
| Part Number                     |  | FSC100000500 | FSC200000500 | FSS1B0000500 | FSS2B0000500 | FSS1R0000500 | FSS2R0000500 |
| <b>Application</b>              |  |              |              |              |              |              |              |
| 2 pipes                         |  | •            | •            | •            | •            | •            | •            |
| 2 pipes with electric heaters   |  | •            | •            | •            | •            | •            | •            |
| 4 pipes                         |  | •            | •            | •            | •            | •            | •            |
| <b>Outputs</b>                  |  |              |              |              |              |              |              |
| Cold water valve                |  | •            | •            | •            | •            | •            | •            |
| Hot water valve                 |  | •            | •            | •            | •            | •            | •            |
| Fan speed                       |  | 3            | 3            | 3            | 3            | 3            | 3            |
| <b>Inputs</b>                   |  |              |              |              |              |              |              |
| Built-in air probe              |  | -            | -            | •            | •            | -            | -            |
| Remote air probe (not supplied) |  | -            | -            | -            | -            | •            | •            |
| Water probe (not supplied)      |  | -            | •            | -            | •            | -            | •            |
| Hot Start digital input         |  | •            | -            | •            | -            | •            | -            |
| <b>Functions</b>                |  |              |              |              |              |              |              |
| Ambient thermostat              |  | -            | -            | •            | •            | •            | •            |
| Manual mode selection           |  | •            | •            | •            | •            | •            | •            |
| Manual speed selection          |  | •            | •            | •            | •            | •            | •            |
| Hot Start with probe            |  | -            | •            | -            | •            | -            | •            |
| Hot Start with digital probe    |  | •            | -            | •            | -            | •            | -            |

## Description of product codes


| Nr.   | Code | Description                       |
|-------|------|-----------------------------------|
| Model | FS   | FC BASICSTAT                      |
| 1st   | C    | CAP                               |
|       | S    | STAT                              |
| 2nd   | 1    | Hot Start Digital Input present   |
|       | 2    | Hot Start Analogic Input present  |
| 3rd   | 0    | Air temperature probe not present |
|       | 1    | Air temperature probe built-in    |
|       | 2    | Air temperature probe remote      |
| 4th   | 0    | Fixed                             |

## User Interface

### FC CAP



### FC STAT

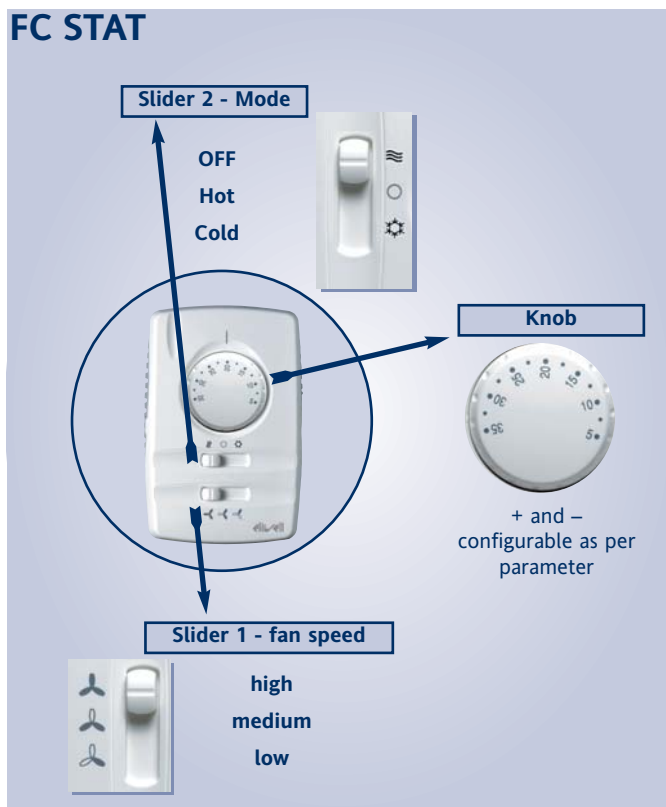

## Technical Data

### FC CAP


- Power supply: 230V~ 50Hz
- Electrical data of 230C output: max. 0.5A max for valve outputs and max. 1 for fan outputs
- Insulation class: II
- Protection rating: IP30
- Analogue inputs: 1 (+1) NTC probes 103 AT-2
  - water probe\* (see wiring diagrams)
- \* probe present depending on model
- Outputs: 2 relay outputs
- Unit dimensions: 120x80x40 mm
- Mounting: wall-mounted, on-board unit
- Housing colour:
  - Front panel: white;
  - Base plate: white.
- Connections: screw-on terminal block for wires
  - with max. diameter 2.5 mm<sup>2</sup> for rigid cable
  - with max. diameter 1.5 mm<sup>2</sup> for flexible cable
- Ambient Temperature: 0...55 °C
- Storage Temperature: -20...85 °C
- Storage humidity: 10...90% (non condensing)
- Conformity: CE LV-EMC conformity

### FC STAT

- Power supply: 230V~ 50Hz
- Electrical data of 230C output: max. 0.5A max for valve outputs and max. 1 for fan outputs
- Insulation class: II
- Protection rating: IP30
- Analogue inputs: 1 (+1) NTC probes 103 AT-2
  - air probe\* (see wiring diagrams)
  - water probe\* (see wiring diagrams)
- \* probe present depending on model
- Outputs: 2 relay outputs
- Unit dimensions: 120x80x40 mm
- Mounting: wall-mounted, on-board unit
- Housing colour:
  - Front panel: white;
  - Base plate: white.
- Connections: screw-on terminal block for wires
  - with max. diameter 2.5 mm<sup>2</sup> for rigid cable
  - with max. diameter 1.5 mm<sup>2</sup> for flexible cable
- Ambient Temperature: 0...55 °C
- Storage Temperature: -20...85 °C
- Storage humidity: 10...90% (non condensing)
- Conformity: CE LV-EMC conformity

## Wiring diagrams


### Models FSC100 FSS110

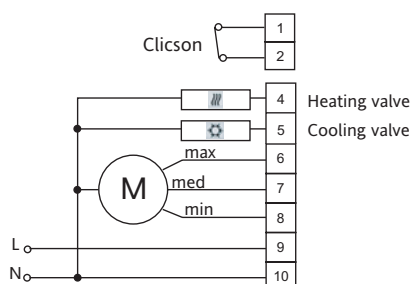

### Legenda

|       |                             |
|-------|-----------------------------|
| 1 - 2 | Hot Start D.I. relay output |
| 4 - 5 | High speed                  |
| 6     | Med speed                   |
| 7     | Low speed                   |
| 8     | L phase                     |
| 9     | N Neutral                   |
| 10    |                             |


### Models FSC200 FSS210

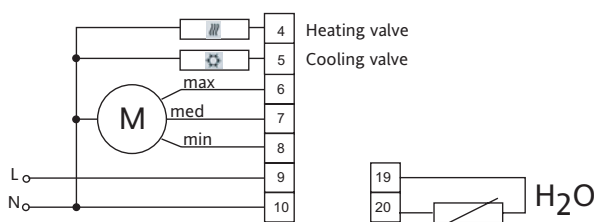

### Legenda

|         |                                |
|---------|--------------------------------|
| 4 - 5   | relay output                   |
| 6       | High speed                     |
| 7       | Med speed                      |
| 8       | Low speed                      |
| 9       | L phase                        |
| 10      | N Neutral                      |
| 19 - 20 | Water probe (H <sub>2</sub> O) |


### Models FSS210

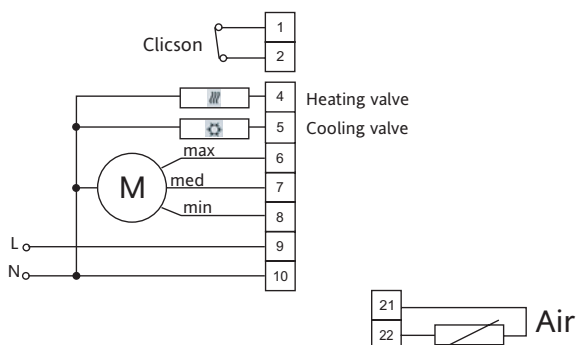

### Legenda

|         |                               |
|---------|-------------------------------|
| 4 - 5   | relay output                  |
| 6       | High speed                    |
| 7       | Med speed                     |
| 8       | Low speed                     |
| 9       | L phase                       |
| 10      | N Neutral                     |
| 19 - 20 | Water probe(H <sub>2</sub> O) |
| 21 - 22 | Air probe (Air)               |

### Models FSS220

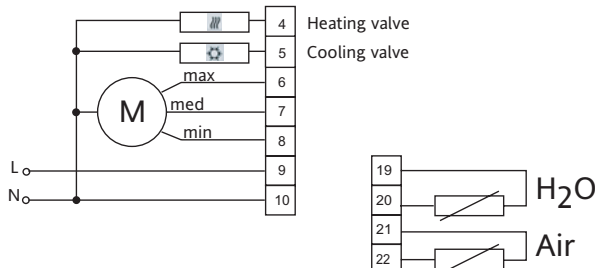

### Legenda

|         |                                |
|---------|--------------------------------|
| 4 - 5   | relay output                   |
| 6       | High speed                     |
| 7       | Med speed                      |
| 8       | Low speed                      |
| 9       | L phase                        |
| 10      | N Neutral                      |
| 19 - 20 | Water Probe (H <sub>2</sub> O) |
| 21 - 22 | Air probe (Air)                |

# eliwell

**ELIWELL CONTROLS s.r.l.**  
Via dell'Industria, 15 Zona Industriale Paludi  
32010 Pieve d'Alpago (BL) ITALY  
Telephone +39 0437 986111  
Facsimile +39 0437 989066  
Internet <http://www.eliwell.it>

**Technical Customer Support:**  
Telephone +39 0437 986300  
Email: [techsuppeliwell@invensyscontrols.com](mailto:techsuppeliwell@invensyscontrols.com)


**Invensys Controls Europe**  
An Invensys Company




Accessories

#### PROBES

##### Remote water probe

 SN8PAA1500 NTC probe, PVC cable, plastic resin AISI 304 pipe with reinforced insulation (metal) 1.5 m long metal cover 6X40

##### Remote air probe

 SN8PCL1500 NTC probe with plastic resin pipe with reinforced insulation 6X40 PVC cable 1.5 m long; plastic cover 7X24.5